

VV-DV





Versatile Use | Long Maintenance Intervals | Attractive Price

GIEBEL Adsorbers® VV-DV – reliable system protection with easy maintenance through a one-way exchange cartridge. Integrated activated carbon separates oil mist, while cyclical self-regeneration ensures very long maintenance intervals.

   Suitable for hydraulics, gears, barrels & IBCs



	VV-DV 1M	VV-DV 1L	VV-DV 2M	VV-DV 2L	VV-DV 3M	VV-DV 3L	VV-DV 5M	VV-DV 5L
Total Weight [kg]	0,2	0,3	0,85	1,1	1,6	2,4	3,4	4,9
GIEBEL Xdry® [kg]	0,08	0,15	0,32	0,55	0,80	1,40	2,15	3,35
Color-change [ml]	28	53	112	193	280	490	753	1173
Height [mm]	97	141	205	263	283	383	321	421
Diameter [mm]	60/63	60/63	90/94	90/94	110/114	110/114	150/154	150/154
Connection	BSP, NPT, Metric	BSP, NPT, Metric	BSP, NPT, Metric, Splitfit	BSP, NPT, Metric, Splitfit	BSP, NPT, Metric, Splitfit	BSP, NPT, Metric, Splitfit	BSP, NPT, Metric, Splitfit	BSP, NPT, Metric, Splitfit
Valves [IN-OUT]	0-0	0-0	0-0	0-0	0-0	0-0	0-0	0-0

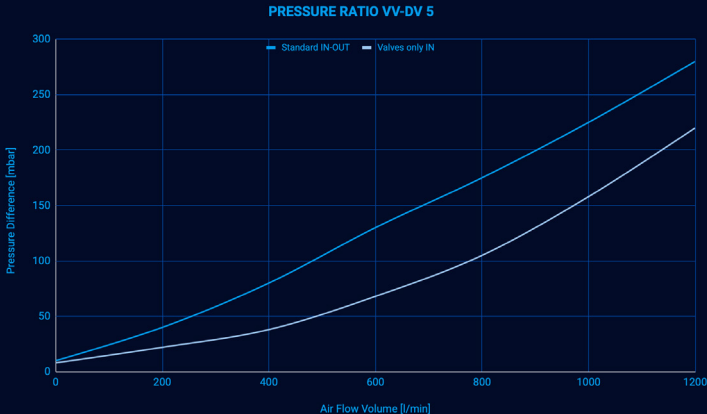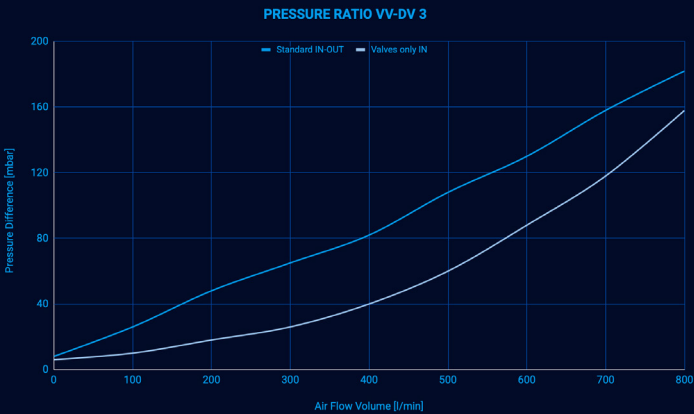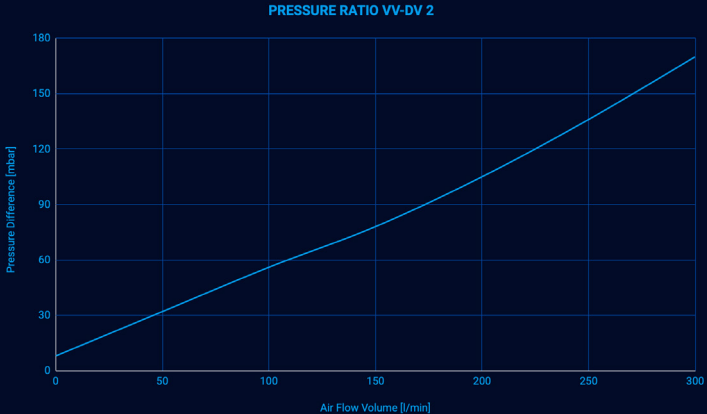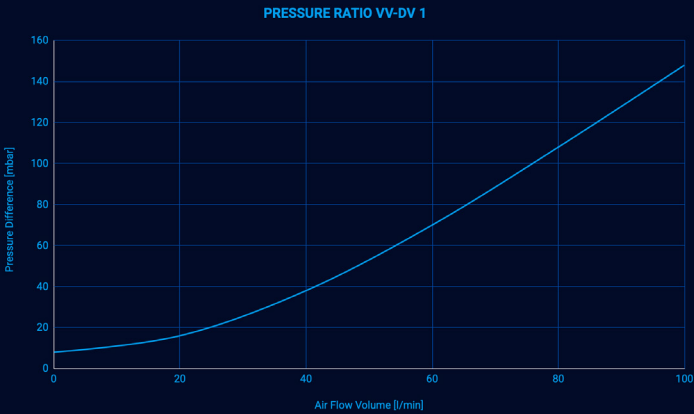

Use	Drying of supply air
Material	Polyamide (PA), poly carbonate (PC) , polyvinyl chloride (PVC), FKM, GIEBEL Xdry®, activated carbon
Substance	Hydraulic oil, Gear oil, Biological oil, Vegetable oil, Transformer oil, Insulating oil, AdBlue (Urea), Diesel fuel, Isocyanates, Polyols, Anhydrite
Refillable	No
Application ATEX 2014	No
Offshore suitable	Yes
Adsorbent quantity	0,08 - 3,40kg (GIEBEL Xdry®)
Valves	Yes
IP protection class	IP 66
UV resistance	High
Temperature range	-40°C ... +80°C / 125°C
Corrosivity class	C5
REACH compliant	Yes
RoHS compliant	Yes
Customs tariff number / Country of origin	84213925 / Germany