

VL-D



Reliable | Disposable | Inline filter

GIEBEL Adsorbers® VL-D – cost-effective inline air flow dryers for hoses and pipelines. Easy to install and replace when saturated, ideal for laboratories, electronics and compressed air applications.

 Suitable for laboratories, electronics, pneumatics & PUR systems.



	VL-D 1L	VL-D 2L	VL-D 3L
Total Weight [kg]	0,3	1,0	2,4
GIEBEL Xdry® [kg]	0,2	0,65	1,7
Color-change [ml]	65	228	595
Height [mm]	134	204	320
Diameter [mm]	60/63	90/94	110/114
Connection	BSP	BSP	BSP
Valves [IN-OUT]	-	-	-

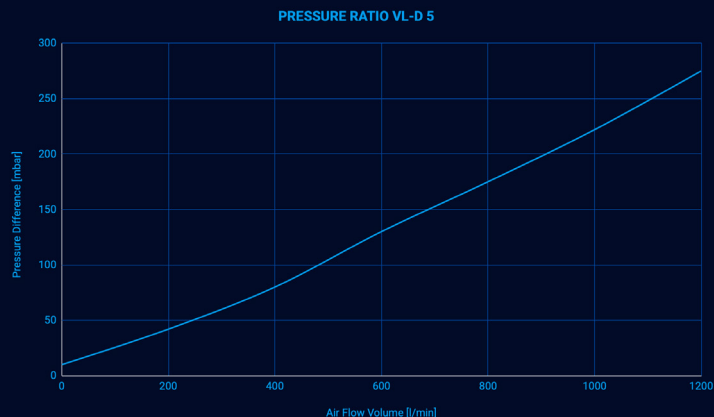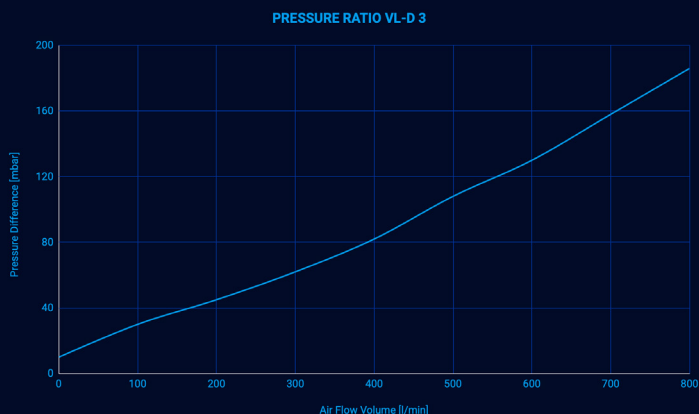

Use	Drying of supply air
Material	Polyamide (PA), polycarbonate (PC), GIEBEL Xdry®, activated carbon
Substance	All mineral oils, all organic oils, all insulating oils, most hydraulic oils, most gear oils, various hardener
Refillable	No
Application ATEX 2014	No
Offshore suitable	No
Adsorbent quantity	0,2 – 1,7kg (GIEBEL Xdry®)
Valves	No
IP protection class	IP 68
UV resistance	High
Temperature range	-40°C ... +80°C / 125°C
Corrosivity class	C5
REACH compliant	Yes
RoHS compliant	Yes
Customs tariff number / Country of origin	84213925 / Germany