

VV-RV



Versatile Use | Long Maintenance Intervals | Sustainable

GIEBEL Adsorbers® VV-RV – refillable adsorbers with a stable glass fibre-reinforced polyamide valve part, activated carbon and spill protection. Effectively separates escaping oil mist, enables cyclical self-regeneration and ensures long maintenance intervals with low maintenance costs.

   Suitable for hydraulics, gears & storage tanks.



	VV-RV 1L	VV-RV 2M	VV-RV 2L	VV-RV 3M	VV-RV 3L	VV-RV 5M	VV-RV 5L
Total Weight [kg]	0,3	1,0	1,35	1,7	2,5	3,9	5,35
GIEBEL Xdry® [kg]	0,15	0,3	0,5	0,75	1,3	2,0	3,15
Color-change [ml]	53	105	175	263	455	700	1103
Height [mm]	143	216	275	294	394	332	432
Diameter [mm]	60/63	90/121	90/121	110/141	110/141	150/181	150/181
Connection	BSP, NPT, Metric	BSP, NPT, Metric, Splitfit	BSP, NPT, Metric, Splitfit	BSP, NPT, Metric, Splitfit	BSP, NPT, Metric, Splitfit	BSP, NPT, Metric, Splitfit	BSP, NPT, Metric, Splitfit
Valves [IN-OUT]	0-0	0-0	0-0	0-0	0-0	0-0	0-0

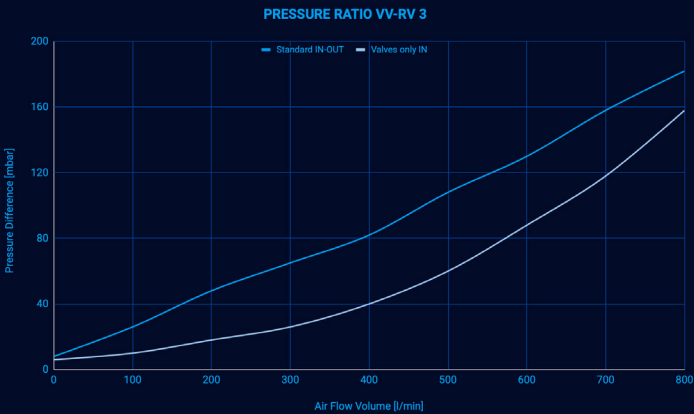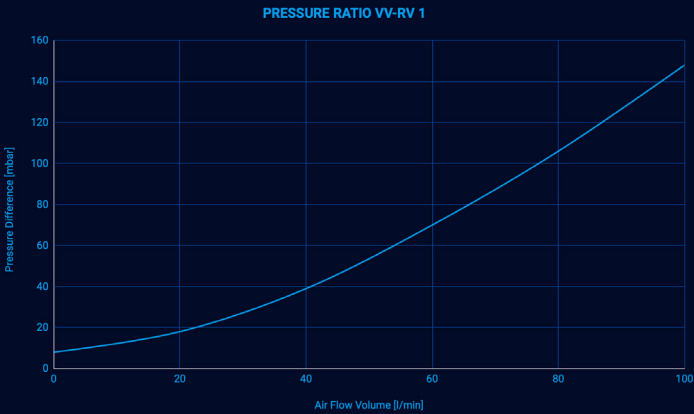

Use	Drying of supply air
Material	Polyamide (PA), acrylicglass, aluminum, FKM, GIEBEL Xdry®, activated carbon
Substance	Hydraulic oil, gear oil, biological oil, vegetable oil, transformer oil, insulating oil, AdBlue (Urea), diesel fuel, isocyanates, polyols, anhydrite/... adhesives, resins, amines, PU metal catalysts, flame retardants, diethanolamine, silicone
Refillable	Yes
Application ATEX 2014	No
Offshore suitable	Yes
Adsorbent quantity	0,3–6,8kg(GIEBELXdry®)
Valves	Yes
IP protection class	IP 66
UV resistance	High
Temperature range	-40°C ... +80°C / 125°C
Corrosivity class	C4
REACH compliant	Yes
RoHS compliant	Yes
Customs tariff number / Country of origin	84213925 / Germany